


## FANUC M-410iB/140H

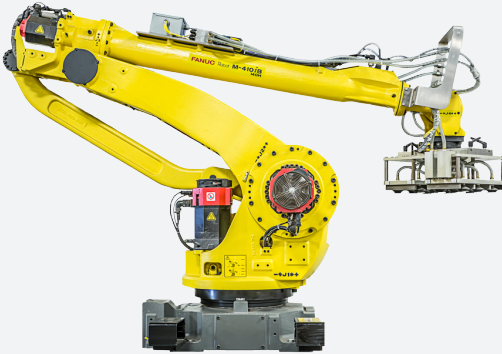

The FANUC M-410iB/140H is specifically designed for high speed palletizing and is capable of many cycles per hour. The specialized m410iB / 140H R-30iA arm efficiently palletizes with quick moves and fast acceleration. This redesigned arm is now more compact and suitable for areas with low ceilings.

Cables are integrated within the FANUC M 410iB/140H R-30iA to simplify installation and reduce interference. The large work area allows the M-410iB/140H to handle high volumes and serve multiple lines.

For more information about the FANUC M-410iB/140H,  
contact a Robotworx representative today at 740-251-4312.

### Robot Information

#### Robot Specifications

Axes:.....5  
Payload:.....140 kg  
H-Reach:.....2850 mm  
Repeatability: ±0.2 mm  
Robot Mass: 1200 kg  
Structure: ..... Vertically Articulated  
Mounting: ..... Floor

#### Robot Motion Speed

J1..... 140°/s (2.44 rad/s)  
J2..... 115°/s (2.01 rad/s)  
J3..... 135°/s (2.36 rad/s)  
J4..... 135°/s (2.36 rad/s)  
J5..... 420°/s (7.33 rad/s)

#### Robot Motion Range

J1..... ±360°  
J2..... ±155°  
J3..... ±112°  
J4..... ±20°  
J5..... ±720°

#### Robot Controllers

R-30iA >  
R-30iB A-Cabinet >  
R-30iB B-Cabinet >  
R-30iB iPendant Touch >

#### Robot Applications

Material Handling >  
Palletizing >  
Pick and Place >