


## FANUC R-2000iB/150U

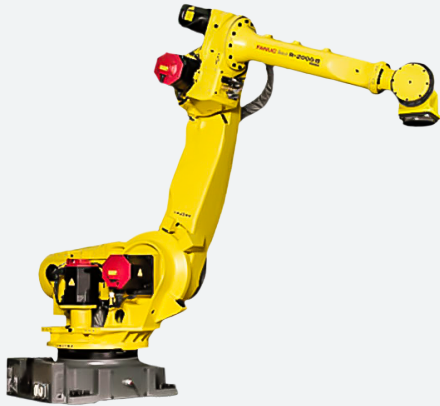

The ceiling mounted FANUC R-2000iB/150U robot has a maximum payload capacity of 150 kg. A reach of 2655 mm, a small footprint, and a large payload capacity make the FANUC R-2000iB/150U R-30iA robot an excellent choice for performing many different material handling applications including machine tending, palletizing, press tending, pick and place, and injection molding.

There are also a wide variety of beautifully reconditioned robots available through RobotWorx, including the used FANUC R-2000iB/150U. The used R-2000iB/150U has undergone a very rigorous refurbishment process, bringing it back to like-new condition. Additionally, the RobotWorx Value Package is included with the purchase of a used FANUC R-2000iB/150U.

For more information about the FANUC R-2000iB/150U, contact a Robotworx representative today at 740-251-4312.

### Robot Information

#### Robot Specifications

Axes:..... 6  
Payload:..... 150 kg  
H-Reach:..... 2655 mm  
Repeatability:±0.2 mm  
Robot Mass: 1070 kg  
Structure: ..... Articulated  
Mounting: .....Inverted

#### Robot Motion Speed

J1..... 110 °/s (1.92 rad/s)  
J2..... 85 °/s (1.48 rad/s)  
J3..... 110 °/s (1.92 rad/s)  
J4..... 150 °/s (2.62 rad/s)  
J5..... 150 °/s (2.62 rad/s)  
J6..... 220 °/s (3.84 rad/s)

#### Robot Motion Range

J1..... ±360°  
J2..... ±136°  
J3..... ±362°  
J4..... ±720°  
J5..... ±250°  
J6..... ±720°

#### Robot Controllers

R-30iA >  
R-30iB A-Cabinet >  
R-30iB B-Cabinet >  
R-30iB iPendant Touch >

#### Robot Applications

Appliance Automation >      Machine Loading/Tending >  
Dispensing >      Material Handling >  
Fiberglass Cutting >      Packaging >  
Injection Molding >      Palletizing >